

# BM 6 T KNX

Item no.: 4940230



Home and Building control  
KNX

## Description

- 6-way binary input FIX1
- 6 floating universal and wide-range voltage inputs (10-240 V AC/DC or internally generated auxiliary voltage of approx. 12 V DC)
- 2 additional channels operable by buttons on the device, but without input
- LED switching status display for each channel
- Manual operation on device (even without bus connection)
- Manual operation per channel for simulating the input states
- All inputs can be operated with different voltages and at different potentials
- Connectable cable length up to 100 m
- Free allocation of functions: switch/push button, dimming, blinds/roller blinds, counter, repeat telegram, sequences



## Technical data

BM 6 T KNX	
Operating voltage KNX	Bus voltage, ≤4 mA
Operating voltage	110 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	~0.3 W
Width	4 modules
Installation type	DIN rail
Type of connection	KNX bus terminal
Max. cable cross section	Solid wire: 0.5 mm <sup>2</sup> (Ø 0.8) to 6 mm <sup>2</sup>   Stranded wire with end sleeve: 0.5 mm <sup>2</sup> to 4 mm <sup>2</sup>
Voltage inputs	10 V DC – 240 V AC 2 mA


BM 6 T KNX	
Max. cable length	100 m
Output	12 V DC / 18 mA, SELV
Display	6 LEDs zur Anzeige des Zustandes am Eingang
Suitable for SELV	Yes, if all inputs are connected with SELV
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 730-1

# BM 6 T KNX


Item no.: 4940230

**theben**

## Connection example



## Scale drawings

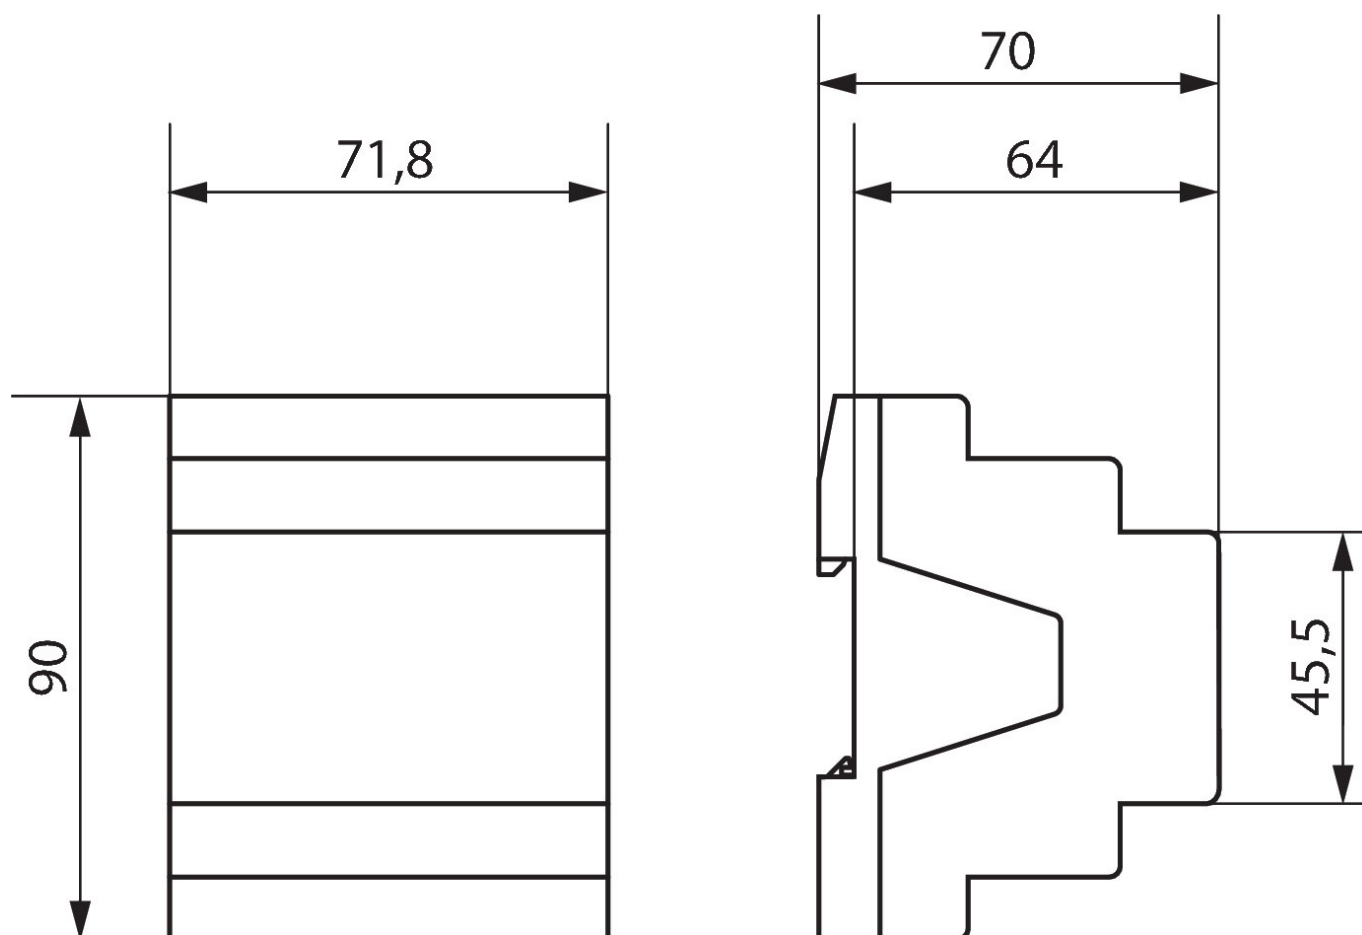

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4940230](http://www.theben.de/product/4940230)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

03/06/2023

Page 2 of 2