

DIMAX 534 plus

Article number: 5340001

Description





- Universal dimmer for R, L and C loads with automatic load detection
- Comfort setting with wake-up and snooze function (can be deactivated), e.g. for children's bedrooms
- Adjustable dimming rate (with automatic functions)
- One and two button operation for ease of use
- Up to 3 light scenes can be called up via separate input (diode module required for more than one light scene)
- Central OFF/ON or light scene for up to 10 devices possible with one push button
- Staircase light function with dimming function in accordance with DIN 18015 - 2 (resettable, long-time function)
- Can be controlled by push buttons or switches e.g. for combination with presence detectors or time switch
- 400 W dimming output, 80 W dimmable energy saving lamps (ESL), 60 W dimmable LED
- Switch-on brightness can be saved individually
- Adjustable minimum brightness (required for ESL and LED)
- Multi-voltage input, e.g. for intercoms
- Low stand-by consumption
- Memory function in the event of power failure
- Automatic electronic overload and overheating switch-off
- Dimming switch-on function
- Permanent ON function (test function)
- No minimum load requirement
- Soft ON and Soft OFF protects the light
- If the DMB 1 T KNX 'Dimbooster' is used, the dimming output can be upgraded to 300 W


Technical data

Operating voltage	230 V AC
Frequency	50 Hz
Width	1 modules
Installation type	DIN rail
Stand-by consumption	0,2 W
Incandescent/halogen lamp load	400 W
Transformer electronic (C)	300 W
Transformer inductive (L)	400 W
energy saving lamps	80 W (dimmable)
LED lamp	60 W
Ambient temperature	-30 °C ... +50 °C
Protection class	II
Type of protection	IP 20

Connection example

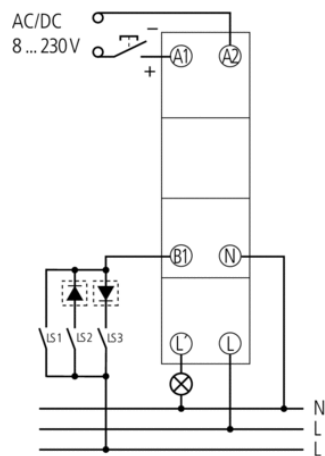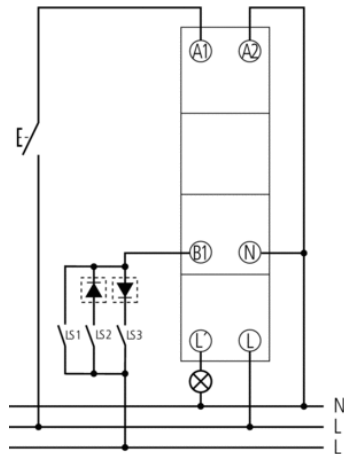

Scale drawings

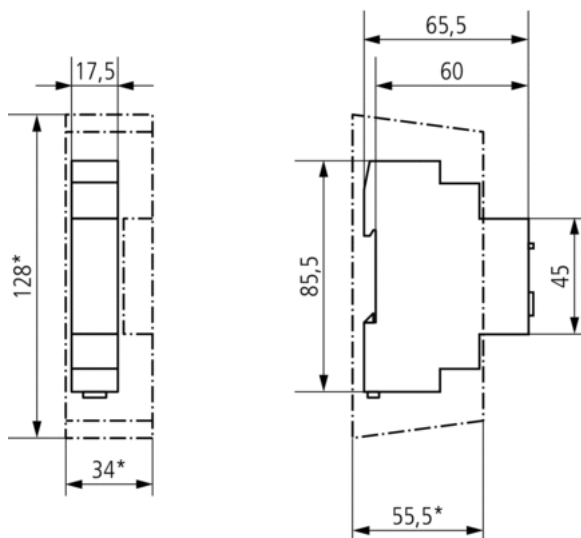

Accessories

Wall mounting kit 17,5 mm

- Article number: 9070065
Details ► www.theben.de



Diode module

- Article number: 9070367
Details ► www.theben.de



Front panel kit

- Article number: 9070001
Details ► www.theben.de

