


General description

- ※Luminance efficiency up to 157LM/W
- ※Self-encapsulated design offers eight optional 1900-6000K white lights
- ※With life span over 36000H
- ※Ta: -25~40° C; Tc: 75° C (max)

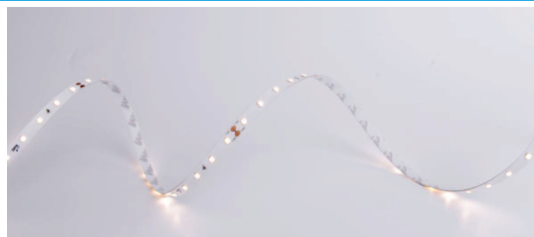

Dimensions

Max.length: 5000mm

Cutting unit: 125mm/8leds

LED pitch: 15.6mm

Min. bend diameter: Φ 60mm

Mounting: 3M tape

IP: IP33/55/65/67



Electronic & output data

Input voltage: 24VDC

Rated current: 0.18A(1meter) /0.78A(5meter)

Typical Power: 4.3W(1meter) /18.72W(5meter)

Power range: 3.8~4.8W

Max.power: 4.8W (If=20mA)

CRI: 80

On-off times: 10000 (test times)

Color	GW	LW	SW	WW	PW	NW	DW	W
CCT	1900K	2300K	2700K	3000K	3500K	4000K	5000K	6000K
Lumen	523lm	582lm	623lm	657lm	657lm	677lm	677lm	657lm
Lm/W	121	135	145	153	153	157	157	153
Energy efficiency	A+	A++	A++	A++	A++	A++	A++	A++

- 1.The tolerance of output data can be vary up to 10%
- 2.the output data tested according to IES LM-79-08
- 3.the output data is based on IP33/1meter
- 4.IP protection process leads changes to size, CCT and luminous flux

