

LUXORliving T2

Item no.: 4800402



Home and Building control
LUXORliving

Description

- 2-way binary input sensor interface LUXORliving
- 4-pole cable connection
- Can be installed in flush-mounted sockets with conventional sensors / switches
- Software functions: Switch / push-button, dimming, blinds
- Colour coding of wiring pairs



Technical data

LUXORliving T2	
Operating voltage KNX	Bus voltage, ≤ 10 mA
Installation type	in flush-mounted socket
Number of inputs	2
Max. cable length	30 m
Length connecting wires	25 cm

LUXORliving T2	
Contact current	0.5 mA
Type of protection	IP 20
Protection class	III

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800402

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/09/2020


Page 1 of 2

LUXORliving T2


Item no.: 4800402

theben
energy saving comfort

Connection example

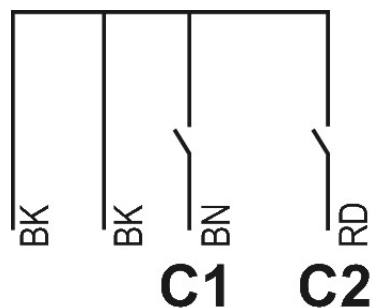

Scale drawings

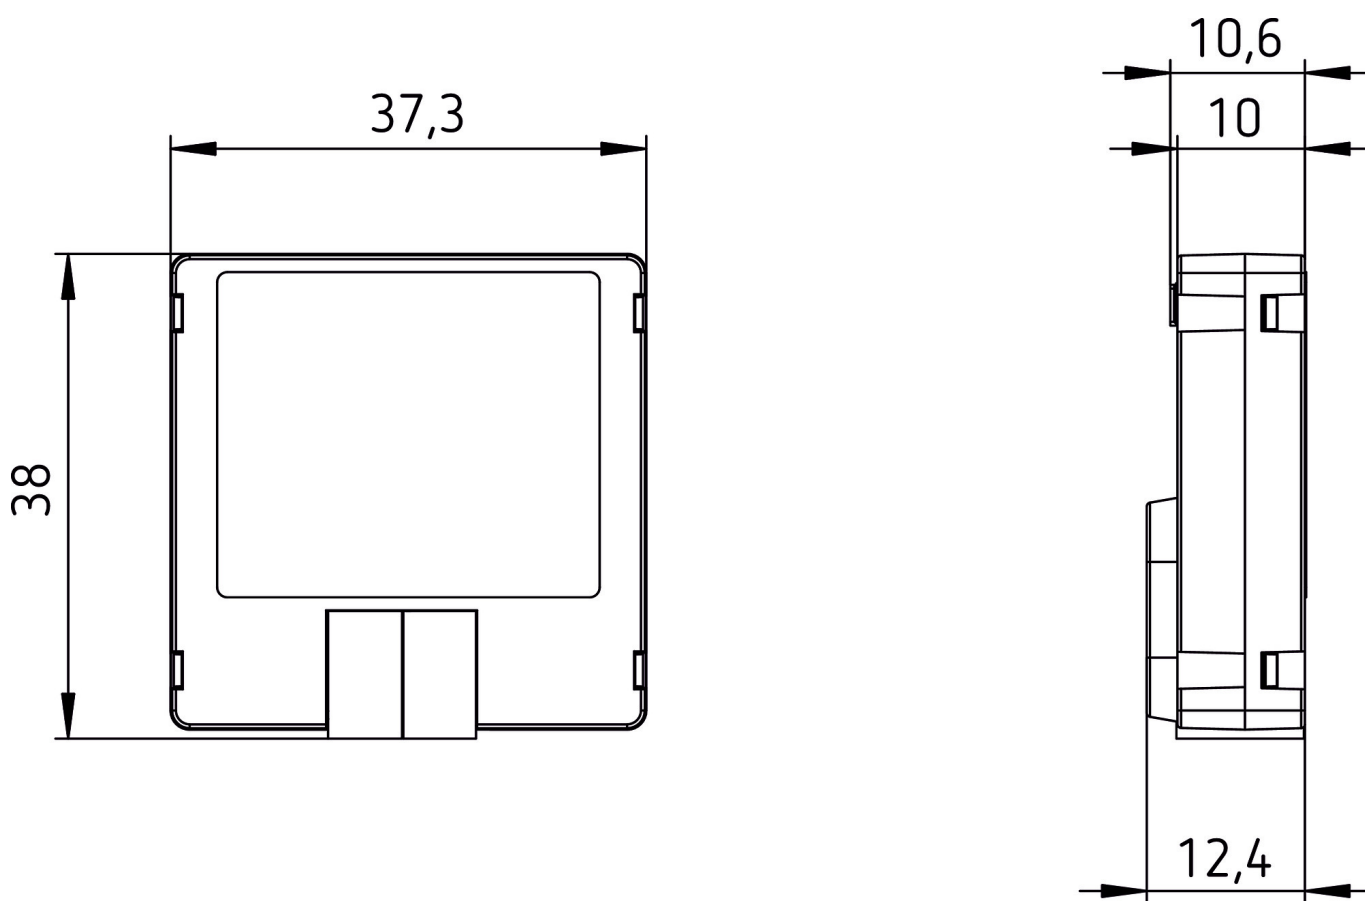

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800402

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/09/2020

Page 2 of 2