



Home and Building control LUXORliving

Description


- 1-way flush-mounted blind actuator LUXORliving
- For controlling drives for blinds, roller blinds, sun and vision protection devices, skylights, and ventilation flaps
- 2 binary inputs for floating contacts such as buttons, switches, window contact, temperature sensor (I2)
- The binary inputs are assigned to the output as standard (function test before programming)
- Integrated temperature monitoring for increased operating



Technical data

LUXORliving J1		LUXORIiving J1	
Operating voltage KNX	Bus voltage, ≤4 mA	Type of contact	10 A
Installation type	Flush-mounted	Ambient temperature	-5°C 45°C
Number of channels	1		


Connection example




LUXORliving J1 Item no.: 4800550



Scale drawings



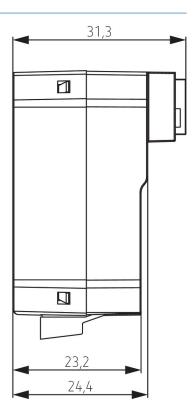

Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP 65

Item no.: 9070459

