


Technical data sheet

Screwless terminal, 3-pin

Item no. 2054485

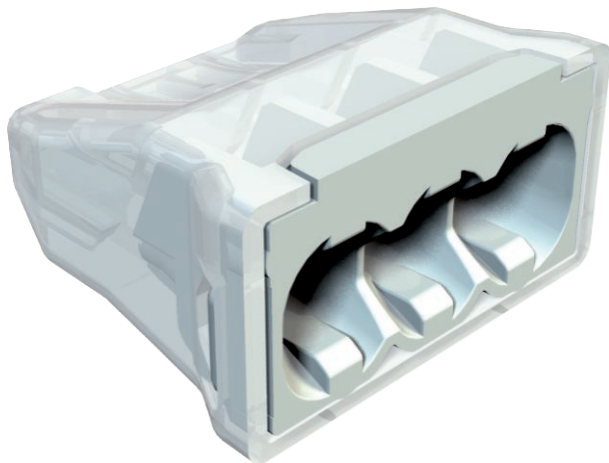

Screwless terminal to connect single-strand cables.
Nominal cross-section:
3 x 0.5 mm² to 2.5 mm² single-wire conductors
3 x 1.5 mm² to 2.5 mm² rigid, multi-wire conductors
Rated voltage 450 V.
Rated current 24 A.
Stripping length: 8–9 mm.
Inspection opening: phase tester and testing pin (max. Ø 2 mm).




PA Polyamide

Master data

Item no.	2054485
Type	61 325 LGR
Description 1	Plug-in terminal
Description 2	screwless terminal
Dimension	3x2,5mm ²
Colour	Light grey
RAL number	7035
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	100,00 Piece
Weight	0,14 kg/100 pc.

Technical data

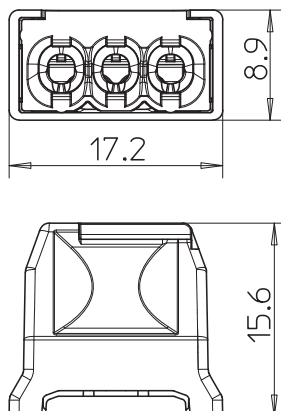

Length	17,20 mm
Width	15,60 mm
Height	8,90 mm
Connectable conductor cross-section, single-wire	0,50 - 2,50 mm ²
Connectable conductor cross-section, multi-wire	1,50 - 2,50 mm ²
No. of terminals	3,00
Flame resistant	Flame resistant to VDE 0471/DIN 695 Part 2-1, test temperature 850 °C
Suitable for flexible conductors	☐
Suitable for solid conductors	☐
Suitable for multi-wire conductors	☒
With actuating levers	☐
Nominal cross section	0,50 - 2,50 mm ²
Nominal voltage	450,00 V

Technical data sheet

Screwless terminal, 3-pin

Item no. 2054485



Technical data

Nominal current	24,00 A
Pole number	3,00
Cross-section	3 x 0.5 mm ² to 2.5 mm ² single-wire conductors 3 x 1.5 mm ² to 2.5 mm ² rigid, multi-wire conductors mm ²
max. permitted ambient temperature	-5,00 - 90,00 °C
Ambient temperature	T 90 °C