

TX6™ U/UTP Outside Plant (OSP) Copper Cable

specifications

Category 6 OSP cable shall meet the ANSI/TIA-568.2-D and IEC 61156-5 Category 6 component Standards. The conductors shall be 23 AWG construction with polyolefin insulation. The cable shall have a gel-filled construction to prevent moisture migration in underground and wet applications and a wide temperature range for extreme weather environments. The copper conductors shall be twisted in pairs, separated by a pair separator and covered with a UV-resistant and abrasion-resistant polyethylene (PE) jacket. Product is to be used in duct and conduit installations only. Not to be used in aerial or direct burial applications.



technical information

Electrical Performance:	Certified channel performance in a 4-connector configuration up to 100m and exceeds ANSI/TIA-568.2-D Category 6 and ISO 11801 Class E standards at swept frequencies up to 250 MHz Certified component performance up to 100m and exceeds the component requirements of ANSI/TIA-568.2-D and IEC 61156-5 Category 6 component standards at swept frequencies up to 250 MHz
Conductors/insulators:	23 AWG solid copper insulated with polyolefin
Standards compliance:	ANSI/TIA-568.2-D Category 6 and ISO 11801 Class E; IEC 60794-1-2F5 Method B Water Prevention Requirement EN50575: Euroclass Fca
Installation tension:	25 lbf (110 N) maximum
Temperature rating:	-22°F to 140°F (-30°C to 60°C) during installation -40°F to 176°F (-40°C to 80°C) during operation
Cable jacket:	Black UV-resistant and abrasion-resistant polyethylene (PE)
Cable diameter:	0.262" (6.7mm) nominal
Cable weight:	0.262" (6.7mm) nominal
Packaging:	1000' (305m) on a reel

key features and benefits

Robust design	Protects against environmental elements that can cause electrical performance failures
Flooding compound	Waterproof gel prevents moisture migration
Reel	Ensures proper performance and provides quick installation
Descending length cable markings	Easy identification of remaining cable reduces installation time and cable scrap

applications

TX6 U/UTP OSP Copper Cable is a component of the TX6 UTP Copper Cabling System. This end-to-end system provides Gigabit Ethernet performance with usable bandwidth beyond 250 MHz. With certified performance to the ANSI/TIA-568.2-D Category 6 and ISO 11801

Class E Standards, this system will support the following applications:

- Ethernet 10BASE-T
- 100BASE-T (Fast Ethernet)
- 1000BASE-T (Gigabit Ethernet)

**PRODUCT IS TO BE USED IN DUCT AND CONDUIT INSTALLATIONS ONLY.
NOT TO BE USED IN AERIAL OR DIRECT BURIAL APPLICATIONS.**

TX6 UTP Copper Cable

OSP: PU06C04BL-CEG

Mini-Com® TX6 PLUS UTP Jack Module

Jack module: CJ688TGIW*

TX6 PLUS UTP Patch Cords – CM

Foot lengths: UTPSP3^Y

Meter lengths: UTPSP1^^MY

DP6™ PLUS Punchdown Patch Panels

Angled, 24-port, 1 RU: DPA24688TGY

Angled, 48-port, 1 RU: DPA48688TGY

Flat, 12-port: DP12688TGY

Flat, 24-port, 1 RU: DP24688TGY

Flat, 48-port, 2 RU: DP48688TGY

Mini-Com® Flush Mount Modular Patch Panels

Angled, 24-port, 1 RU: CPPA24FMWBLY

Angled, 48-port, 1 RU: CPPA48FMWBLY

Flat, 24-port, 1 RU: CPPA24FMWBLY

Flat, 48-port, 2 RU: CPPA48FMWBLY

Termination and Cable Prep Tools

Termination tools: EGJT or TGJT

Conductor stripping tool: CWST

Conductor stripping tool: CCAST


*To designate a color, add suffix
IW (Off White), EI (Electric Ivory),
IG (International Gray), WH (White),
BL (Black), OR (Orange), RD (Red),
BU (Blue), GR (Green), YL (Yellow), or
VL (Violet).
Country of Origin, China: PU06C04BL-CEG

TX6™ U/UTP Outside Plant (OSP) Copper Cable

additional specification

Mechanical Test	
Ultimate Breaking Strength	>90 lbf (400 N)
Minimum Bend Radius	4 × Cable Diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	67% nominal
Operating Voltage, Maximum	80 V

cable construction

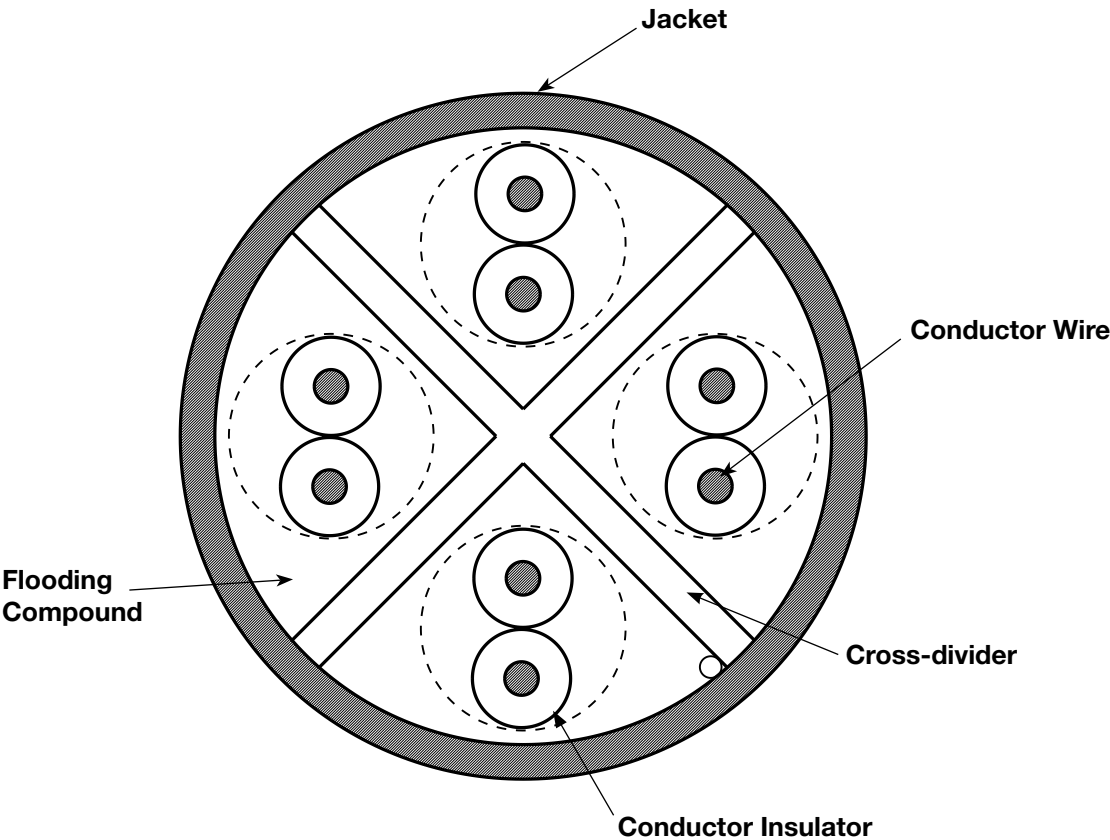

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300	PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200	PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575	PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000	PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000	PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020
--	---	---	--	--	---

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

©2023 Panduit Corp.
ALL RIGHTS RESERVED.
COSP407--WW-ENG
5/2023