


Überspannungsableiter
Surge protective device
Parafoudre
Limitador de sobretensão


Installation

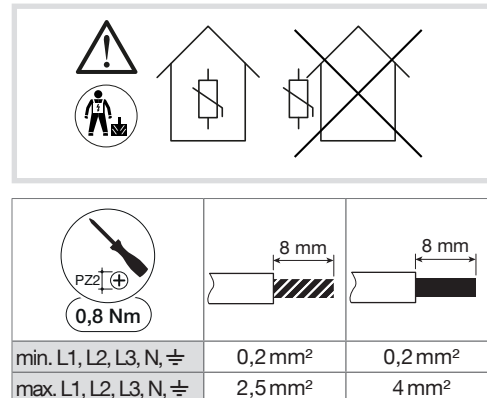


SPC403N

EN 61643-11 IEC 61643-11	Type 3 Class III
System	TT, TN
F1 max	25A gG/B/C
I _n (8/20 µs)	L1-L2-L3(N)/PE, L1-L2-L3/N = 3kA
I _{SCCR}	1,5kA rms
I _{pe}	< 5µA
U _n	230/400V (50/60 Hz)
U _c	264V (50/60 Hz)
U _{oc}	L1-L2-L3(N)/PE, L1-L2-L3/N = 6kV
U _p	L1-L2-L3/N ≤ 1,4kV L1-L2-L3(N)/PE ≤ 1,5kV
Humidity	5%...95%
9°C	-40/+70°C
Ports	1
IP code	IP 20 (built in)
LxWxH	90mmx36mmx73mm
I _L	26A (30°)


Es ist kein zusätzlicher Abstand vom SPD zu geerdeten Flächen einzuhalten/
Indoor use only - There is no distance from the SPD to any earthed conductive surface required

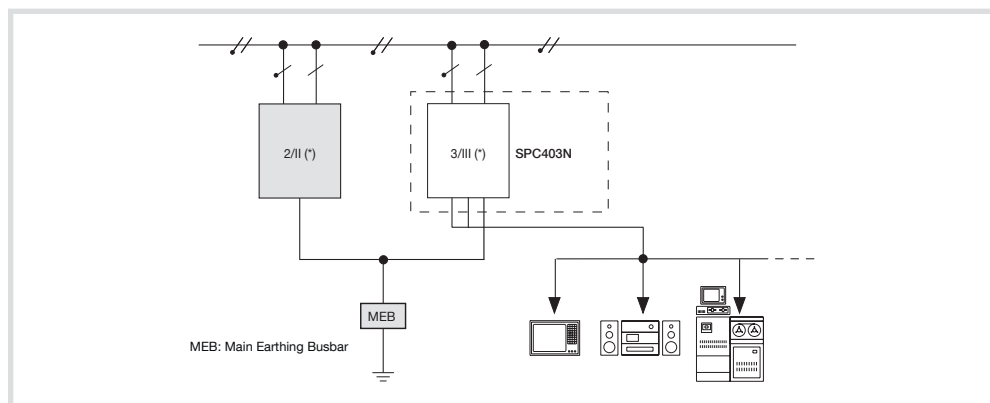


Defektanzeige/Fault indication

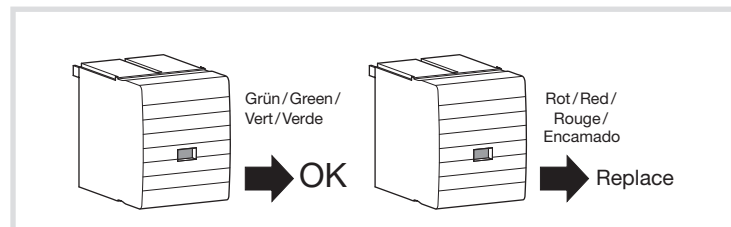

SPC403N

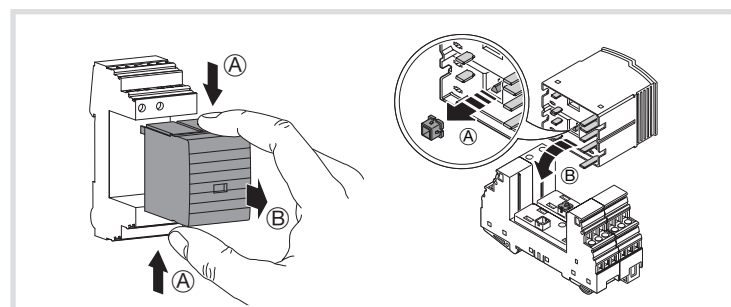


Fernmeldekontakt/Remote indication

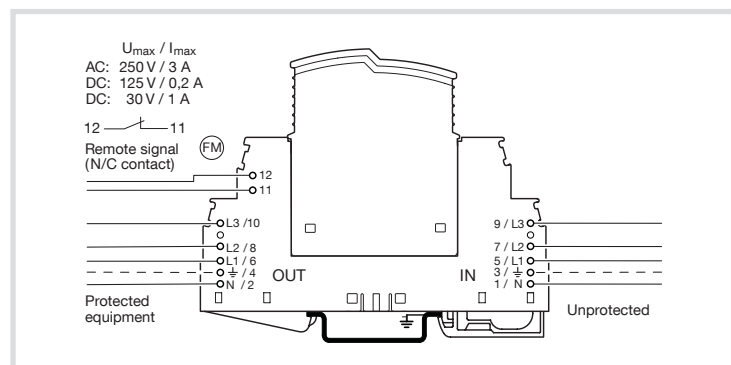


Durchgangsverdrahtung/Serial connection

Vorsicherung/Backup fuse

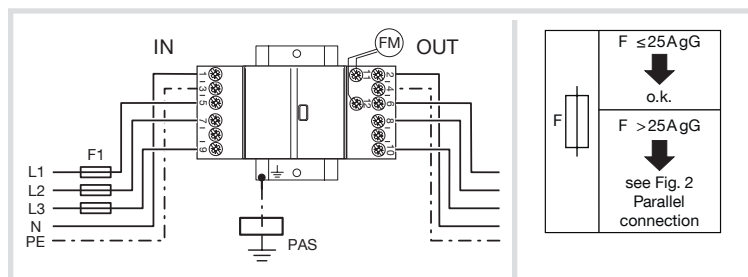

Stichverdrahtung/Parallel connection

Vorsicherung/Backup fuse

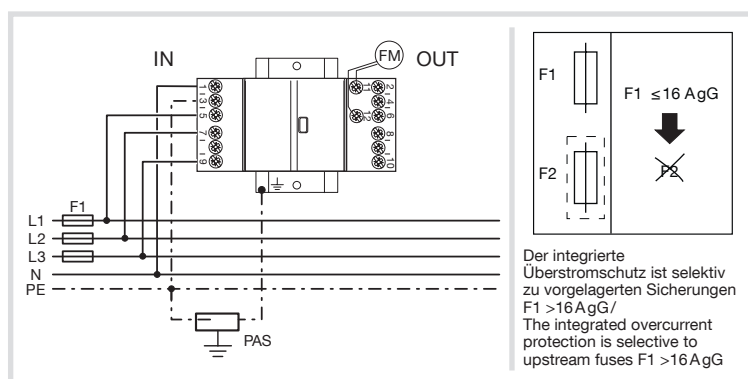

Anschlussschema/Connection diagram

