

## ToLEDo Retro Ball Dimmable

ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL

0029494



### Product features

- Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps
- The versatile ToLEDo Retro ball range is the ideal replacement for halogen and incandescent lamps and perfect for chandeliers and decorative applications
- Same look, size and functionality as incandescent lamps
- Omni-directional light distribution
- Gives same sparkling light effect as the incandescent lamp
- Dimensionally identical to incandescent lamps - fits all fixtures
- Environment-friendly - no mercury and lower CO2 emissions
- Dimmable with approved dimmers



### NOTES

undefined

### PRODUCT OVERVIEW

Product name	ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL
Technology	LED
Watt (Rated) (W)	4.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740943
Warranty	3 years
Luminous flux (lm)	470
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	4.5
Product Voltage (V)	230
Dimmable	Yes
Average life (Nominal) (h)	15000
Product EAN number	5410288294940

## ToLEDo Retro Ball Dimmable

*ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL*

0029494

### DATA TABLE

#### General data

Product name	ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL
Technology	LED
Watt (Rated) (W)	4.5
Type	LED exchangeable
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C - 45°C
Performance ambient temperature T <sub>q</sub> (°C)	25
ETIM Class	EC001959
E-number FI	4740943
Warranty	3 years

#### Optical data

Luminous flux (lm)	470
Luminous flux (Rated) (lm)	470
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

#### Electrical data

Wattage (W)	4.5
Equivalent watt (W)	40
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	No
Dimmable	Yes
Inrush Current (A)	1.2
Inrush Duration (µs)	520
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50Hz
Max. Luminaires per 16A C Breaker	133
Max. Luminaires per 16A B Breaker	66

#### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

## ToLEDo Retro Ball Dimmable

*ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL*

0029494

### Physical data

Nominal Product Length (mm)	80
Nominal Product Diameter (mm)	45
Weight (kg)	0.045


### Packaging

Single packaging type	Carton
Product EAN number	5410288294940
Packaging single length / height (cm)	9.5
Packaging single width (cm)	5.0
Packaging single depth (cm)	5.0
DUN14 (outer)	15410288294947
Units per outer package	6
Packaging outer length / height (cm)	15.8
Packaging outer width (cm)	10.7
Packaging outer depth (cm)	10.5


### Safety data

Optimal operating condition (°C)	-10-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

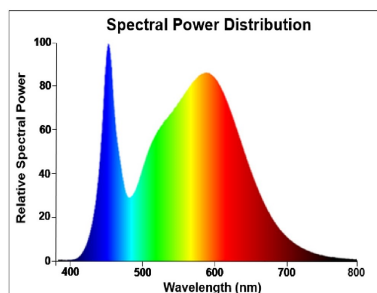

## TECHNICAL DRAWINGS




ToLEDo Retro Ball Dimmable  
*ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL*  
0029494

**ENERG**

**SYLVANIA**

0029494

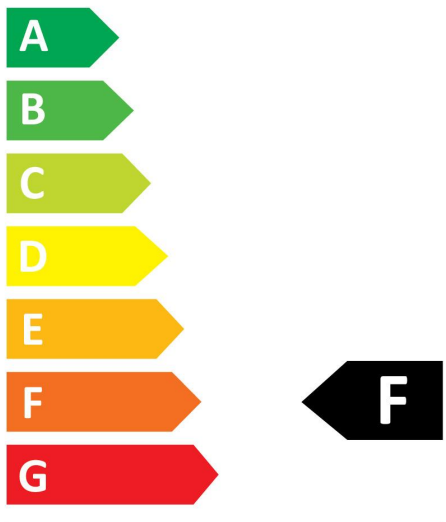

5

kWh/1000h




2019/2015

ToLEDo Retro Ball Dimmable  
*ToLEDo RT Ball V5 ST DIM 470LM 840 E14 SL*  
0029494



0029494

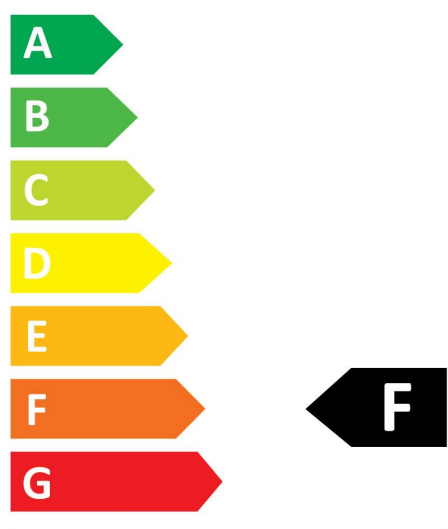

**5**  
kWh/1000h

