

Specification

Recessed stretch spotlights

GLE-ME35S03 Series



Ra>90 CRI

UGR<19 Glare Index

Flicker-free

IP20 IP level


Feature :

Demension :

GLE-ME35S03

GLE-ME35S03 (8W)

Opening size: 142*37mm

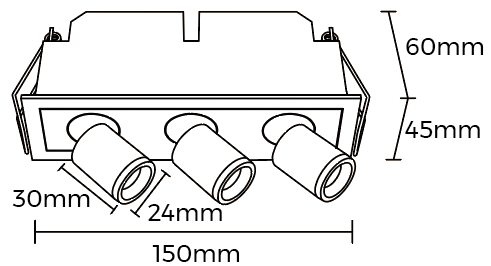

- Adopt high-brightness, COB light source, CRI≥90.
- High-density aluminum integrated die-casting shell, good heat-conductive. Four open cooling channels, super-large cooling area, make full use of air convection for efficient cooling and less light decay.
- Deep anti-glare design, large anti-glare angle.
- Excellent light distribution together with brand reflector, creates more natural light transition. Featured in uniform light and high peak light intensity.
- Stretchable spotlight head, horizontal 0-355° and vertical 0-90° adjustable for different specific lighting scenarios.
- Constant current flicker-free power, efficiently relieves visual fatigue.




Product parameters :

Input voltage	220-240VAC/110V	LED source	SMD
Power	8W	MacAdam	SDCM < 3 step
Lumens	GLE-ME35S03 : 527LM		
CCT	3000K/3500K/4000K	IP Code	IP20
CRI	90	Dimmable	No Dimming (Customizable: DALI/1-10V Dimming)
Beam angles	30°/40°	Working temp	-20 °C- 50 °C
Adjustable	Horizontal :0-355° Vertical:0-90°	Installation	Recessed
Housing	Black/white	Warranty	3 years

Remark :

- 1、 The output data is based on the testing result of 3000K/20° luminaires
- 2、 The tolerance of output data can be vary up to 10%;
- 3、 The output data is typical value.


Luminous intensity distribution diagram :

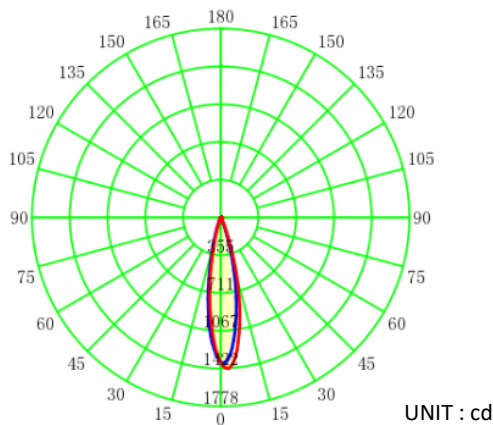

AVERAGE BEAM ANGLE(50%) :

— C0-C180 — C90-C270

30°

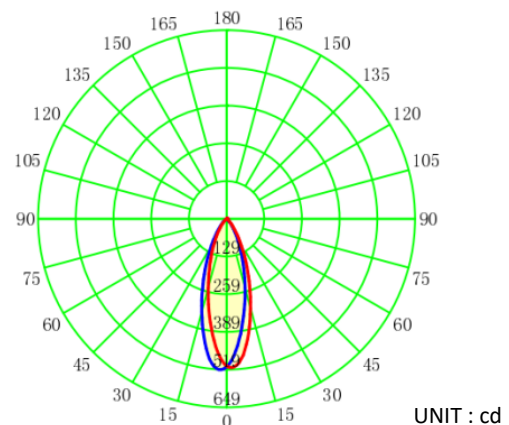

AVERAGE BEAM ANGLE(50%) :

— C0-C180 — C90-C270

40°



Ordering code :

Category	Series	Installation method	Size	Optical type	Power/ Grating amount	Power supply	CRI	CCT	COLOR	Diffuser nature
Grille lights GLE	Magicube series M	Recessed E	35mm 35	Spotlight S	Single 01	Non-dimming N	Ra > 90 9	3000k 30	Black B	20° 20
					Double 02			3500k 35		White W
					Three 03			4000k 40		
GLE	M	E	35	S	01	N	9	30	B	20

