

LUXORliving M140

Item no.: 4800490

theben
energy saving comfort

Home and Building control
LUXORliving

Description

- Self contained outdoor weather station LUXORliving
- For measuring wind, rain, brightness and temperature
- Rain sensor with integrated heating
- For fully automatic blinds and sun protection control
- Measurement and evaluation directly on device
- Sun protection for up to 4 facades via 3 integrated brightness sensors
- Display of weather data e.g. with LUXORliving-App „LUXORplay“




Technical data

LUXORliving M140	
Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Operating voltage KNX	Bus voltage, ≤ 10 mA
Stand-by consumption	< 5.5 W
Measuring range brightness	100000 lx
Setting range temperature	$-30^{\circ}\text{C} \dots 60^{\circ}\text{C}$

LUXORliving M140	
Measuring range wind speed	2 – 30 m/s
Ambient temperature	$-20^{\circ}\text{C} \dots 55^{\circ}\text{C}$
Type of protection	IP 44
Protection class	II

Scale drawings

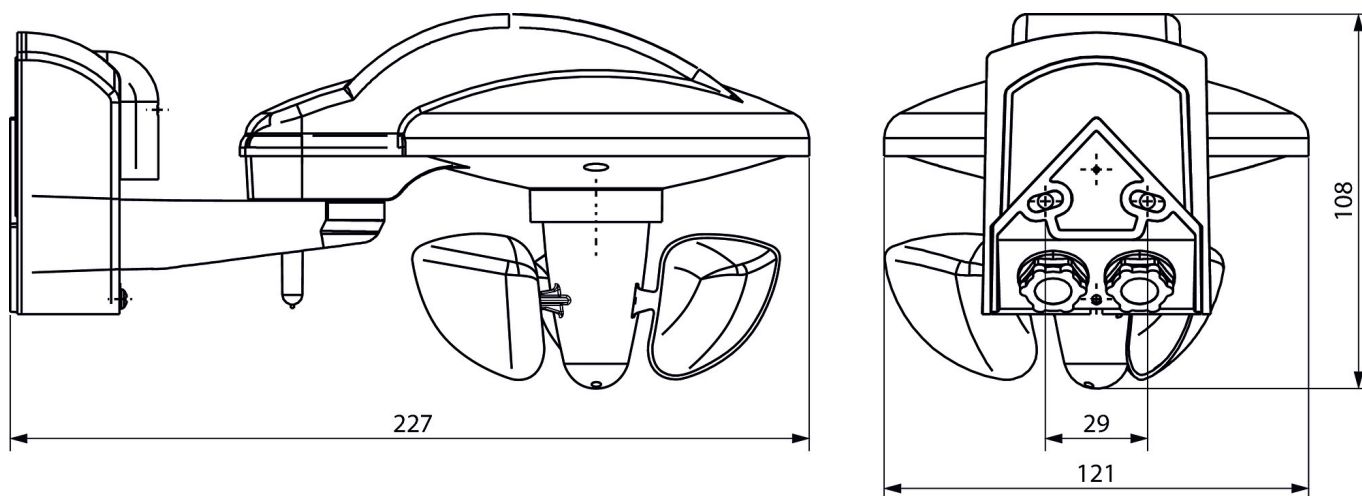

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800490

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/09/2020

Page 1 of 2

LUXORliving M140

Item no.: 4800490

theben
energy saving comfort

Accessories

Mast mounting S

Item no.: 9070928

