



How to Configure Cloud Access for Remote Management

CHAPTERS

1. How to Configure Cloud Access
2. How Cloud Access Works



This guide applies to:

EAP110 / EAP115 / EAP225 / EAP245 / EAP320 / EAP330 / EAP115-Wall / EAP225-Wall / EAP110-Outdoor / EAP225-Outdoor / EAP Controller (Omada Software Controller) / OC200

You can use a controller to manage EAP devices in your wireless network. In the local network, it's easy to access the controller via your management devices, such as a PC or a mobile device, because your controller and management device can communicate with each other directly. However, if you want to access the controller in a remote network, for example, to access your controller at home when you are at the office, your controller and management device cannot communicate with each other directly via the internet. Traditionally, you can use the VPN or port forwarding technology to meet the requirement, but both of them are difficult to configure. To simplify the configuration procedure, you can use the cloud access function of the controller. With this function enabled, it is really convenient to access your controller and manage your wireless network anytime and anywhere.

This article will cover the following topics:

- [How to Configure Cloud Access](#)
- [How Cloud Access Works](#)

1 How to Configure Cloud Access

Some preparations are required before you can access the controller via the cloud. This section provides detailed steps on how to prepare for it. If you are interested in the principle of the technique, the [How Cloud Access Works](#) section will give you an insight into the function.

The configuration procedure differs depending on the controller and management device you use. You can use either an Omada Cloud Controller or an Omada Software Controller as the controller, and either a PC or a mobile device as the management device.

If you use an Omada Cloud Controller as the controller, refer to [Using an Omada Cloud Controller as the Controller](#).

If you use an Omada Software Controller as the controller, refer to [Using an Omada Software Controller as the Controller](#).

Using an Omada Cloud Controller as the Controller


If you use a PC as the management device, refer to [Using a PC as the Management Device](#).

If you use a mobile device as the management device, refer to [Using a Mobile Device as the Management Device](#).

- **Using a PC as the Management Device**

1. Set Up the Network


Set up your network according to the following figure. EAPs and the controller are connected to the local network. Devices in the local network can obtain their IP addresses from the router and access the internet via the router. Make sure that both the PC and the Omada Cloud Controller have access to the internet.

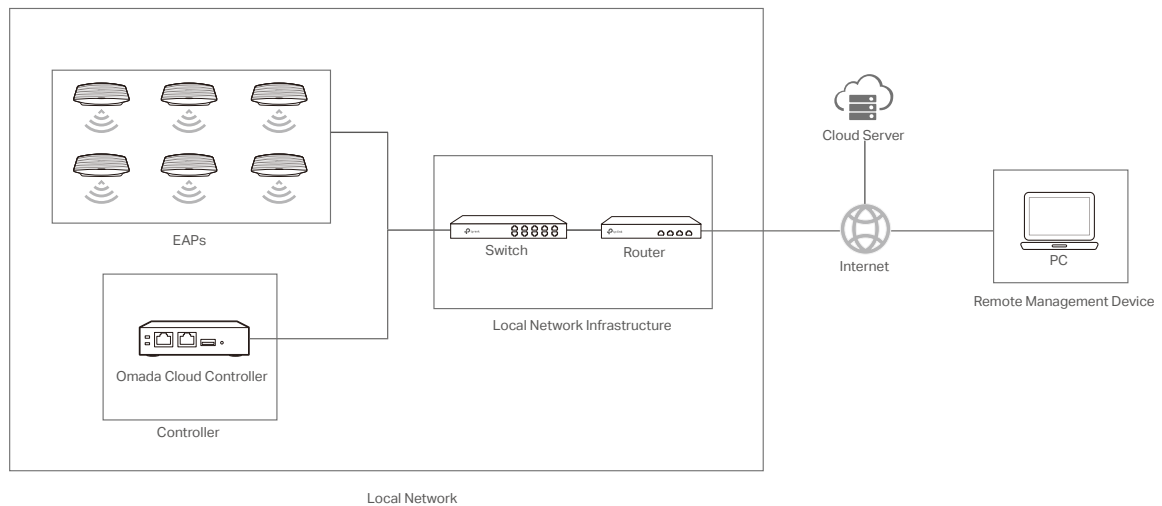


2. Register a TP-Link ID

If you already have a TP-Link ID, skip this step. Otherwise, register a TP-Link ID.

1) Open a web browser and go to the Omada Cloud: <https://omada.tplinkcloud.com>

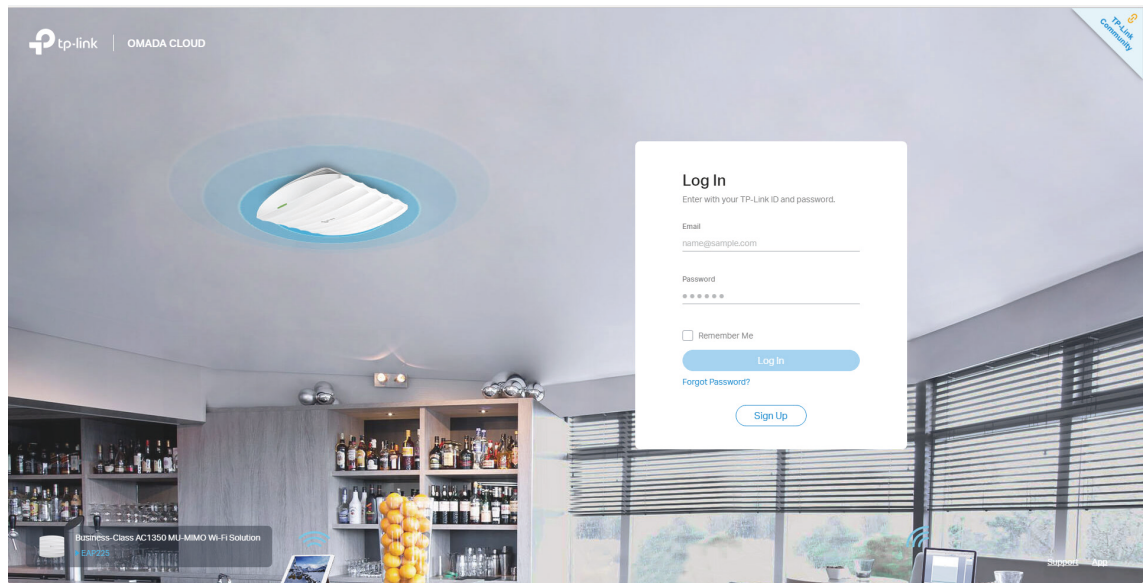


2) Click **Sign Up** to load the following page. Enter your email address and a password, and confirm your password. This email address will be your TP-Link ID. Check the box next to **I agree to TP-Link's Term of Use and Privacy Policy**, if you agree to them. Click **Sign Up**. An activation email will be sent to your email address.

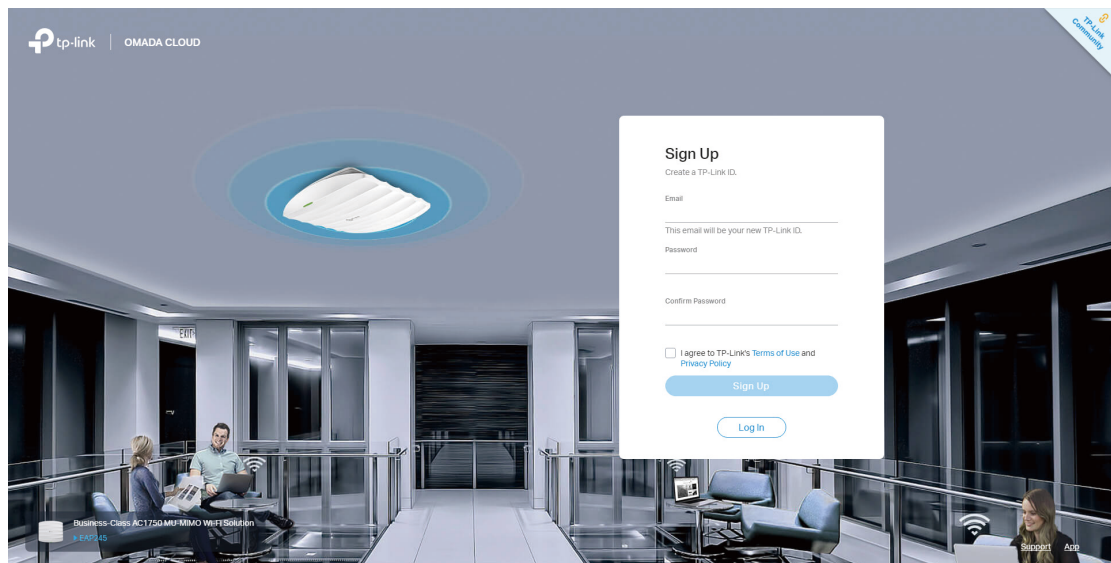

3) Check your email box for the activation email. Click on the **Click to Finish Registration** button.



☐ **Activate Your TP-Link ID**

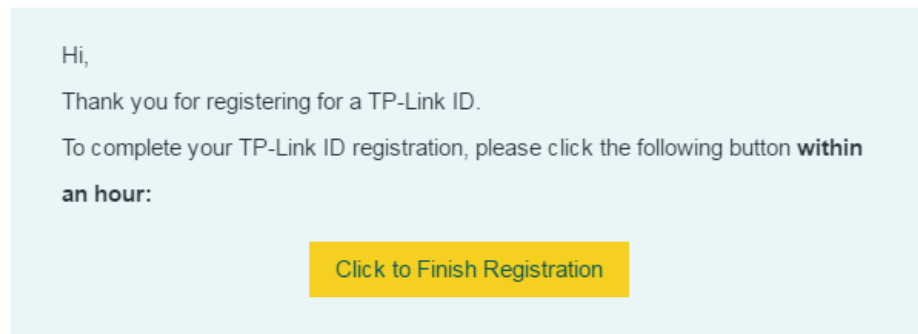

Do not reply to this email; it was sent from an unmonitored email address.

For inquiries, please contact our Technical Support at www.tp-link.com/support.

Sincerely,


TP-Link Cloud Team

Congratulations! You are now an Omada Cloud user.


3. Bind the Controller to Your TP-Link ID


Log into the Omada Cloud management page with your TP-Link ID and bind the controller to your TP-Link ID.

1) Open a web browser and go to the Omada Cloud: <https://omada.tplinkcloud.com>. In the **Log In** page, enter your TP-Link ID and password. Click **Log In**.

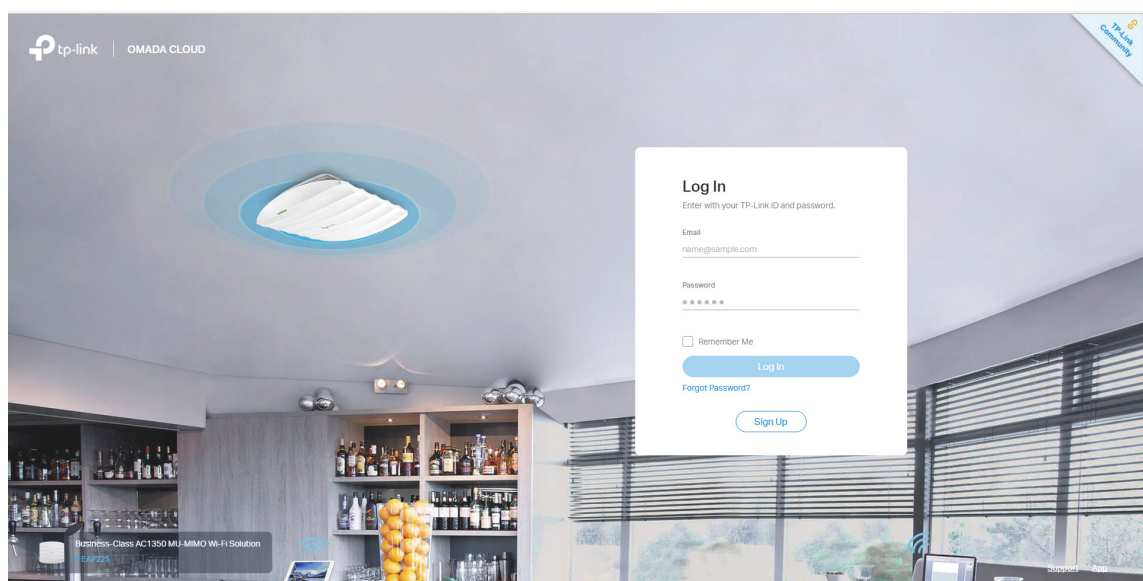


2) You will open the Omada Cloud management page.

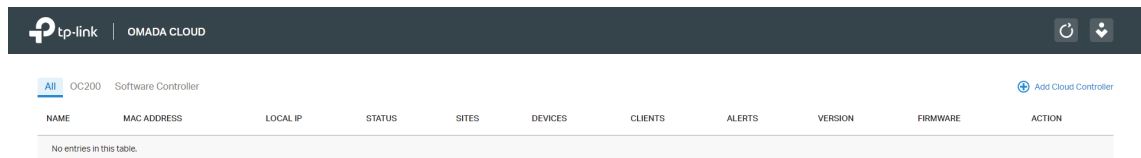


3) Click  **Add Cloud Controller** to load the following page. Make sure the following items:


- The Omada Cloud Controller is powered on and its Cloud LED is flashing, which indicates that it has access to the internet.
- The Cloud Access function of the Omada Cloud Controller is enabled (it is enabled by default).

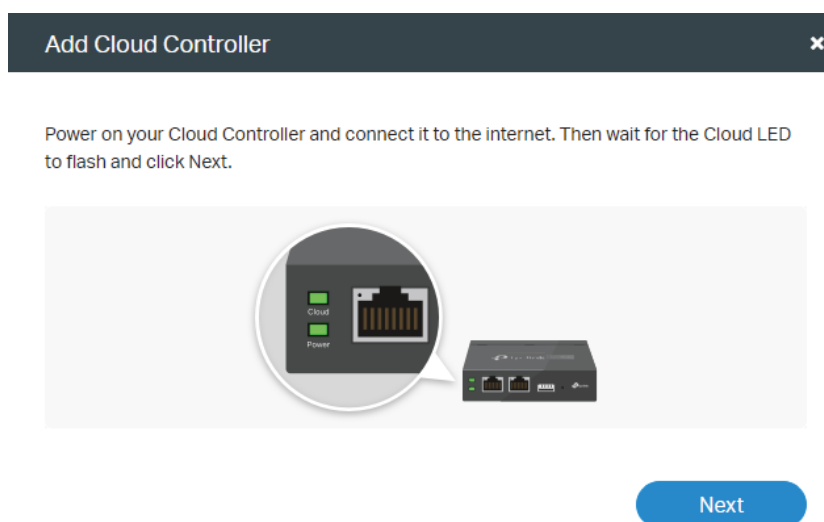


4) Click **Next** to load the following page. Enter the device key, which is displayed on the back of the Omada Cloud Controller. Type the characters in the Image.

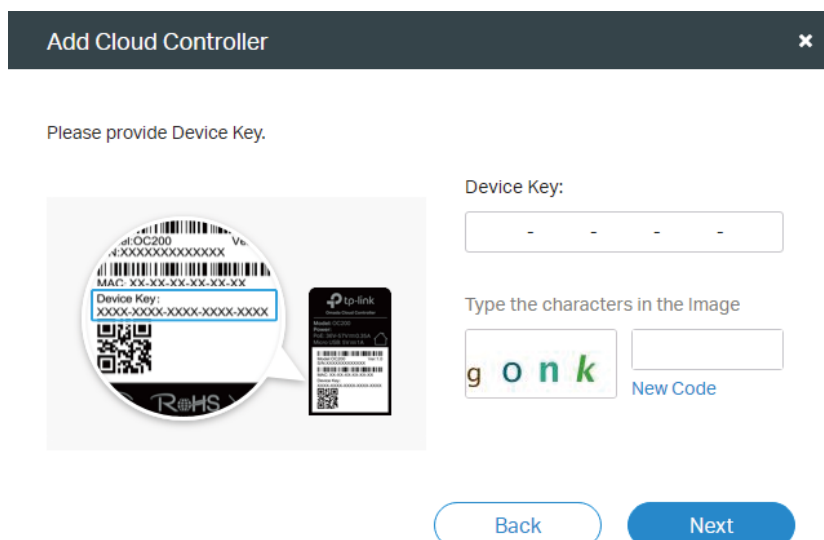


5) Click **Next** to load the following page. Click **Done**.

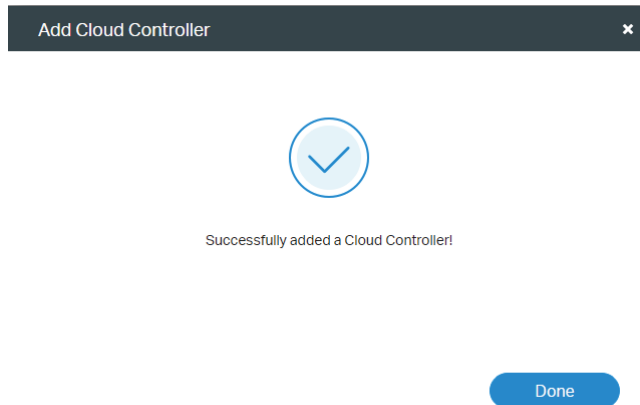


The controller is now bound to your TP-Link ID. The information of controllers which are bound to your TP-Link ID will be displayed in the table on the Omada Cloud management page.

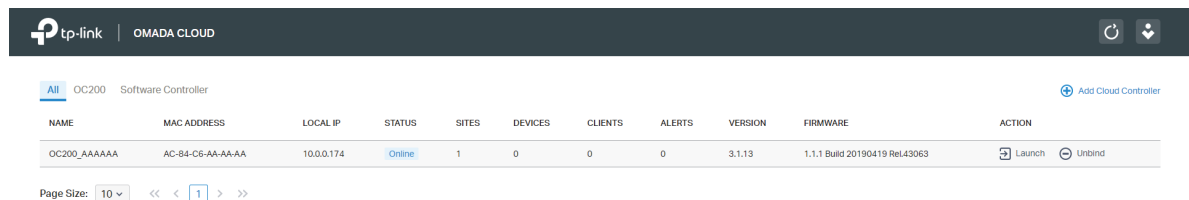

4. Open the Controller Management Page

On the Omada Cloud management page, click  **Launch** to open the controller management page.

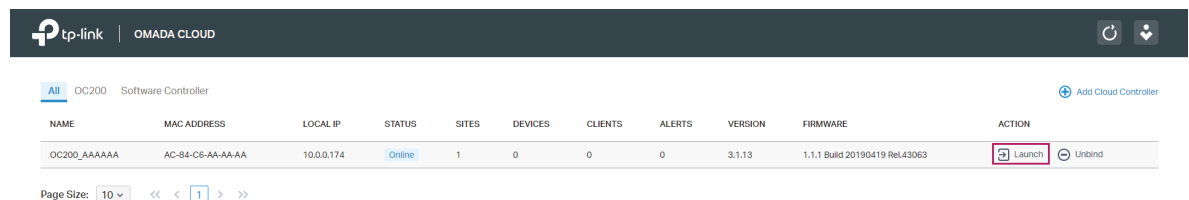


Now you can access the controller remotely. Furthermore, you can configure the controller to adopt the EAPs in the local network and then manage the EAPs centrally.

• Using a Mobile Device as the Management Device

1. Set Up the Network

Set up your network according to the following figure. EAPs and the controller are connected to the local network. Devices in the local network can obtain their IP addresses from the router and access the internet via the router. Make sure that both the mobile device and the Omada Cloud Controller have access to the internet.

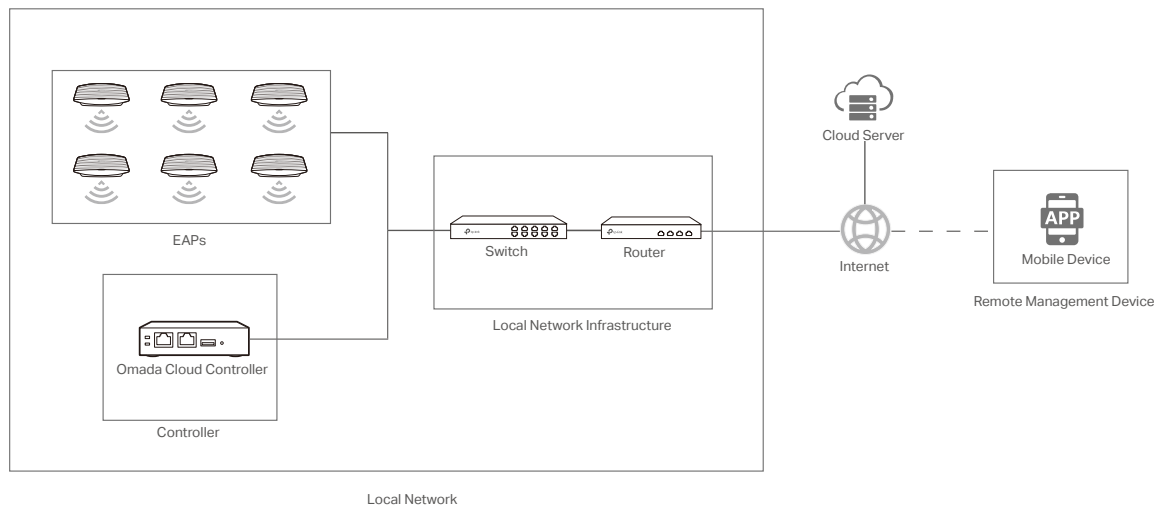

2. Register a TP-Link ID

If you already have a TP-Link ID, skip this step. Otherwise, register a TP-Link ID.

1) Launch the Omada APP on your mobile device.

If you don't have an Omada APP, you can download it from APP Store or Google Play, or simply scan the QR Code below.



or



Scan for Omada App

Download Omada App

2) Go to the **Account** page, click **Login**, and click **Sign Up** to load the following page. Enter your email address and a password. This email address will be your TP-Link ID. Check the box next

to I agree to TP-Link's Term of Use and Privacy Policy, if you agree to them. Click **Sign Up**. An activation email will be sent to your email address.

No SIM 4:53 PM

<

Sign Up

Create a TP-Link ID.

Email

Password

☒ I agree to TP-Link's [Terms of Use](#) and [Privacy Policy](#).

Sign Up

3) Check your email box for the activation email. Click on the **Click to Finish Registration** button.



☐ [Activate Your TP-Link ID](#)

Hi,

Thank you for registering for a TP-Link ID.

To complete your TP-Link ID registration, please click the following button **within an hour**:

Click to Finish Registration

Do not reply to this email; it was sent from an unmonitored email address.


For inquiries, please contact our Technical Support at www.tp-link.com/support.

Sincerely,
TP-Link Cloud Team

Congratulations! You are now an Omada Cloud user.

3. Bind the Controller to Your TP-Link ID

- 1) On the Omada APP, go to the **Account** page and click **Login** to load the following page. Enter your email address and password. Check the box next to **I agree to TP-Link's Term of Use and Privacy Policy**, if you agree to them. Click **Log In**.

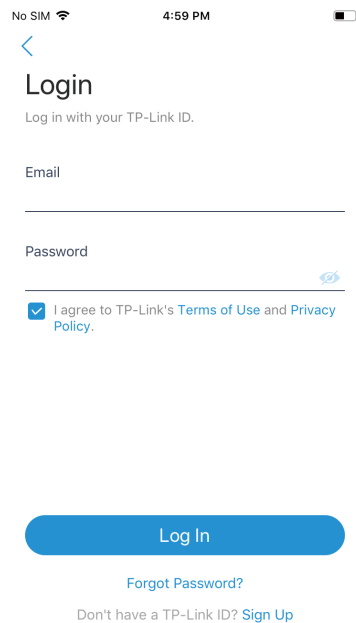

No SIM 4:59 PM

<

Login

Log in with your TP-Link ID.

Email

Password


☒ I agree to TP-Link's [Terms of Use](#) and [Privacy Policy](#).

Log In

[Forgot Password?](#)


Don't have a TP-Link ID? [Sign Up](#)

- 2) Go to the **Cloud Access** page on the Omada APP.

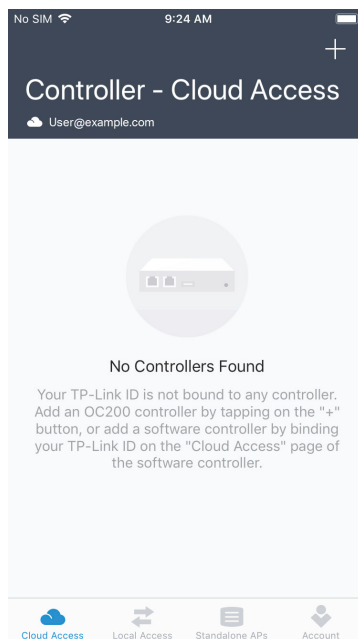

3) Click + to load the following page. Make sure the following items:


- The Omada Cloud Controller is powered on and its Cloud LED is flashing, which indicates that it has access to the internet.
- The Cloud Access function of the Omada Cloud Controller is enabled (it is enabled by default).




Make sure that the LED of your Cloud Controller is flashing slowly.

Next


4) Click **Next**. To bind the Omada Cloud Controller to your TP-Link ID, you can either scan the QR Code, or enter the device key manually. The QR Code and device key are displayed on the back of the Omada Cloud Controller.

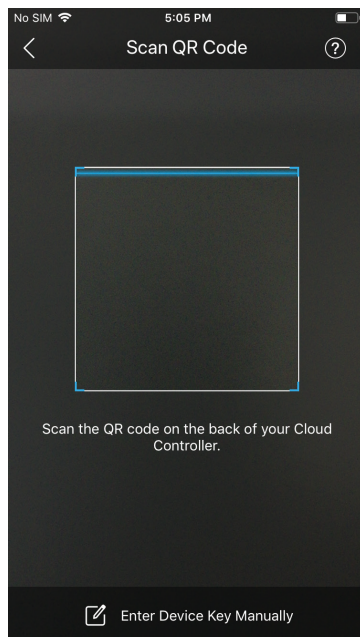

5) On the following page, click **Done**.

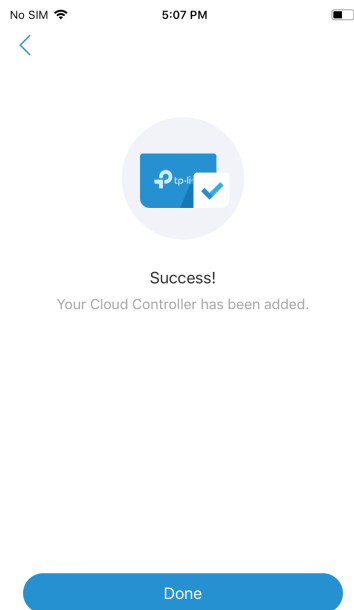


The controller is now bound to your TP-Link ID. The information of controllers which are bound to your TP-Link ID will be displayed on the **Cloud Access** page.

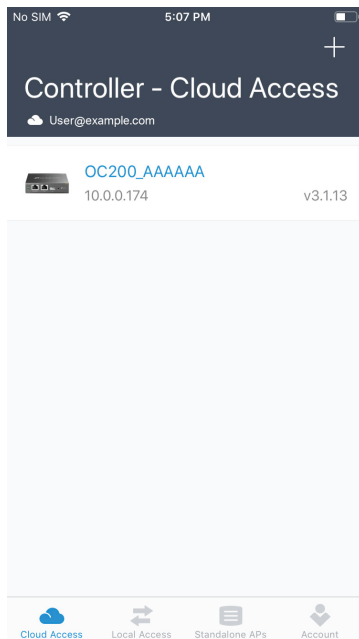

4. Open the Controller Management Page

On the **Cloud Access** page, click on the Omada Cloud Controller to open the controller management page.

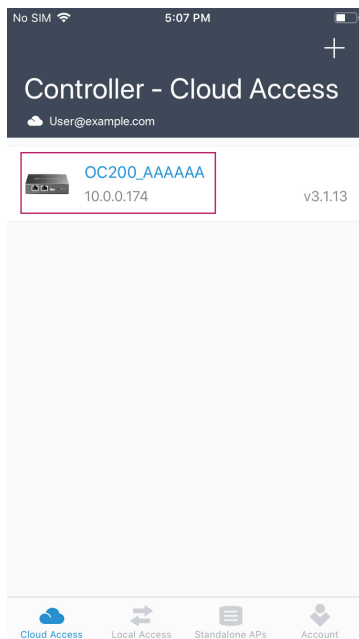

Now you can access the controller remotely. Furthermore, you can configure the controller to adopt the EAPs in the local network and then manage the EAPs centrally.

Using an Omada Software Controller as the Controller


If you use a PC as the management device, refer to [Using a PC as the Management Device](#).

If you use a mobile device as the management device, refer to [Using a Mobile Device as the Management Device](#).

- **Using a PC as the Management Device**

1. Set Up the Network


Set up your network according to the following figure. EAPs and the controller are connected to the local network. Devices in the local network can obtain their IP addresses from the router and access the internet via the router. Make sure that both the PC and the Omada Software Controller have access to the internet.

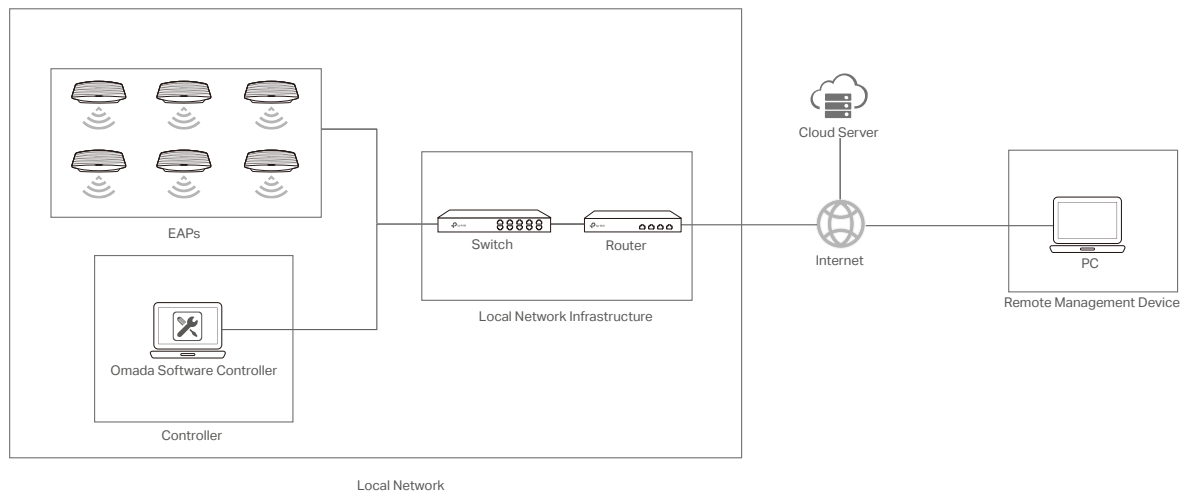


2. Register a TP-Link ID

If you already have a TP-Link ID, skip this step. Otherwise, register a TP-Link ID.

1) Open a web browser and go to the Omada Cloud: <https://omada.tplinkcloud.com>

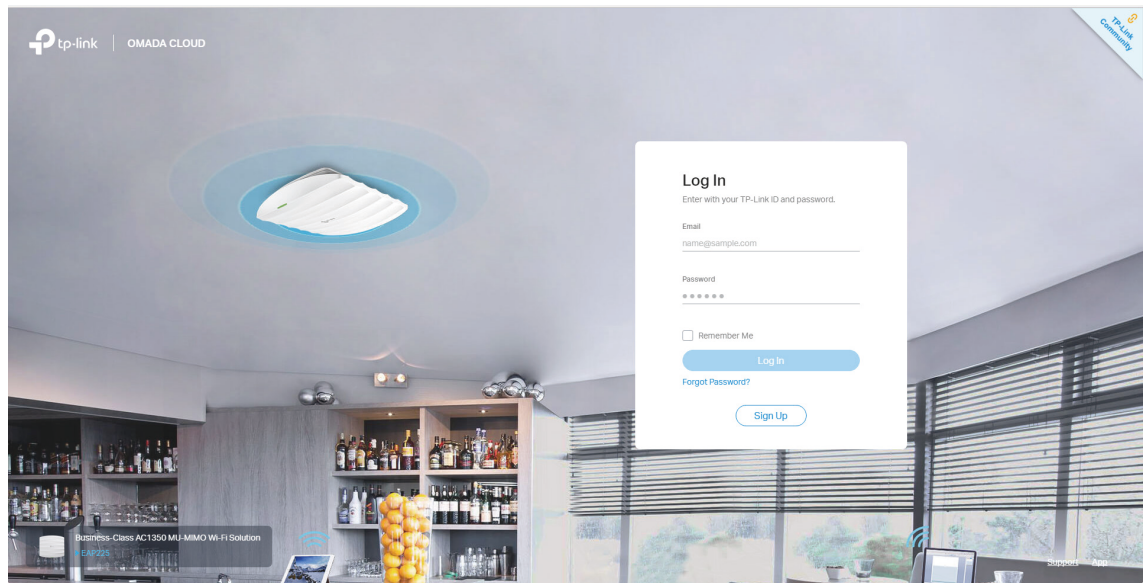


2) Click **Sign Up** to load the following page. Enter your email address and a password, and confirm your password. This email address will be your TP-Link ID. Check the box next to **I agree to TP-Link's Term of Use and Privacy Policy**, if you agree to them. Click **Sign Up**. An activation email will be sent to your email address.

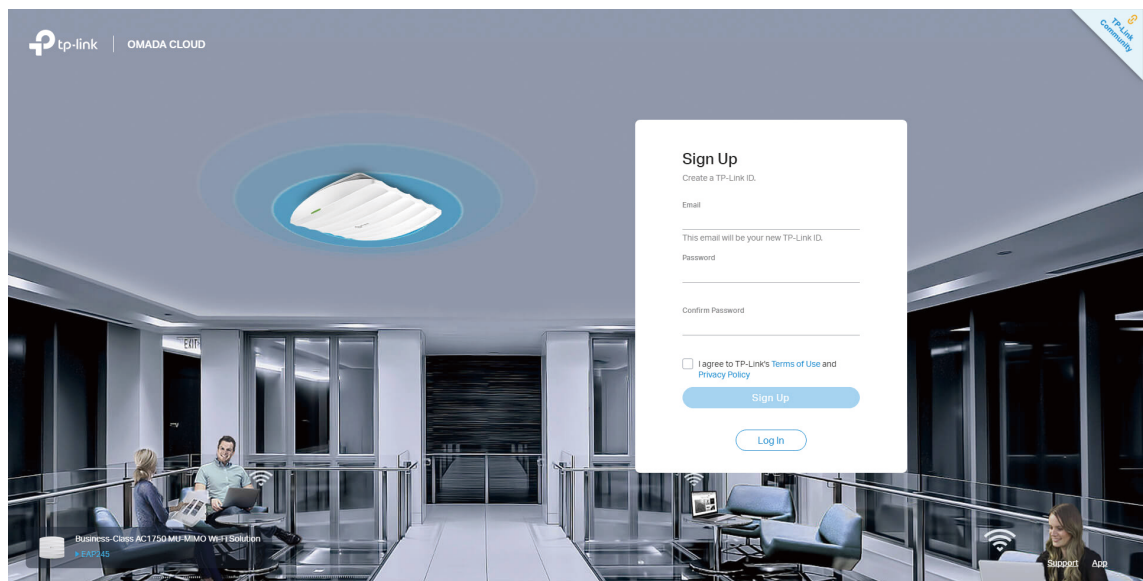

3) Check your email box for the activation email. Click on the **Click to Finish Registration** button.



 **Activate Your TP-Link ID**

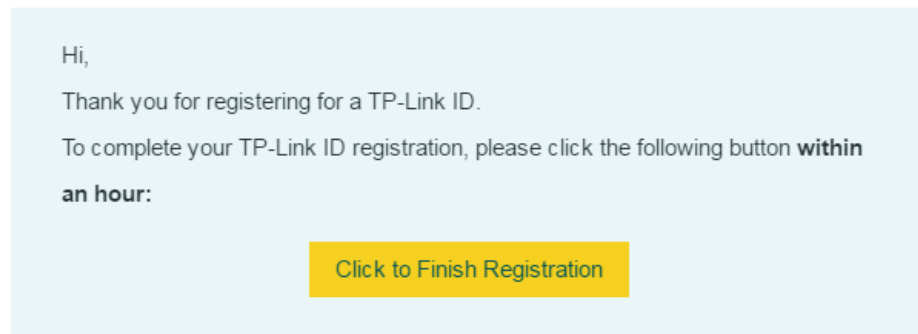

Do not reply to this email; it was sent from an unmonitored email address.


For inquiries, please contact our Technical Support at www.tp-link.com/support.

Sincerely,

TP-Link Cloud Team

Congratulations! You are now an Omada Cloud user.


3. Bind the Controller to Your TP-Link ID

Launch the Omada Software Controller. Launch a web browser to manage the Omada Software Controller. On the management page, click  and go to the **Cloud Access** page. Enable the **Cloud Access** function. Enter your email address and password. Click **Log in and bind**.


The controller is now bound to your TP-Link ID.

4. Log Into the Omada Cloud Management Page


- 1) Open a web browser and go to the Omada Cloud: <https://omada.tplinkcloud.com>. In the **Log In** page, enter your TP-Link ID and password. Click **Log In**.

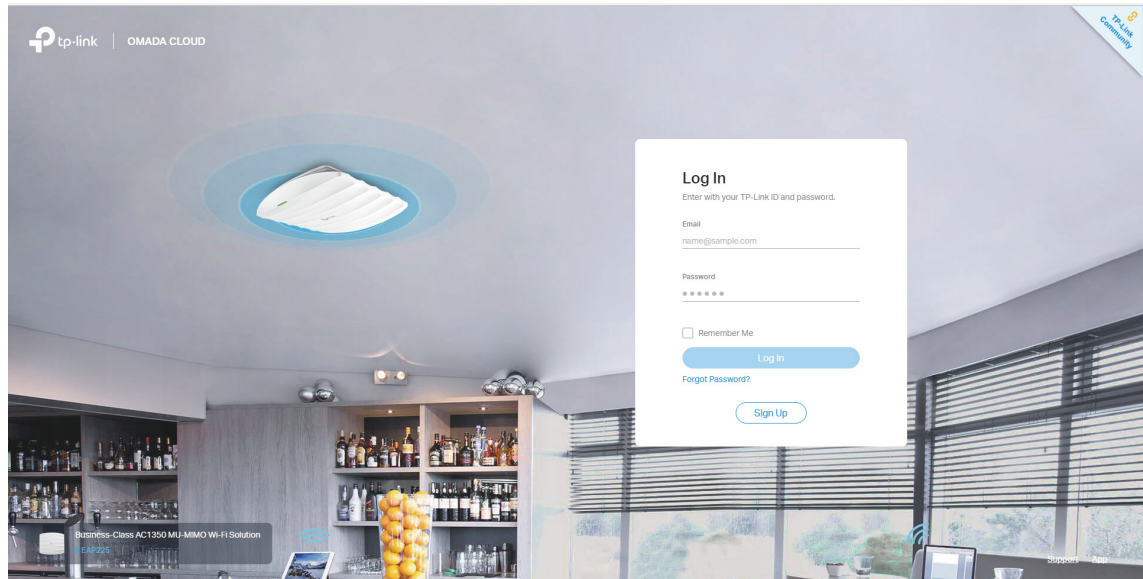


- 2) You will open the Omada Cloud management page. The information of controllers which are bound to your TP-Link ID will be displayed in the table on the Omada Cloud management page.

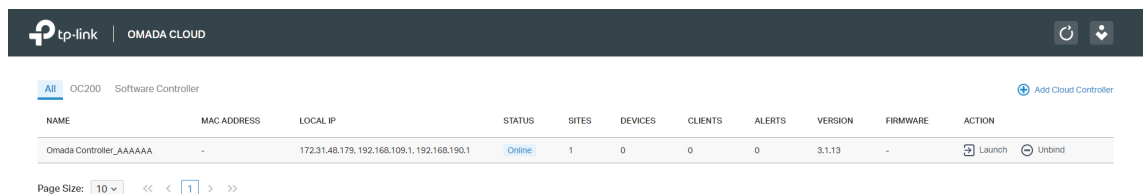

5. Open the Controller Management Page

On the Omada Cloud management page, click  **Launch** to open the controller management page.

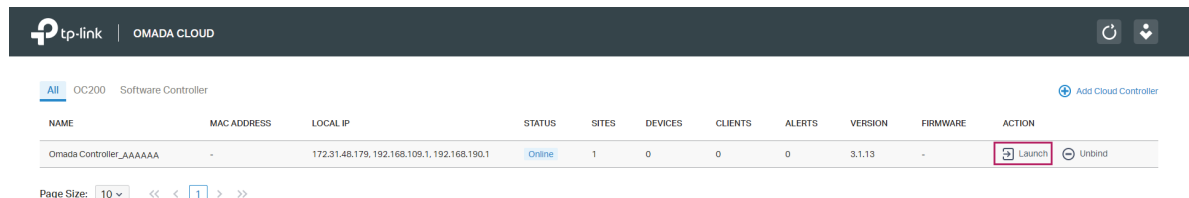


Now you can access the controller remotely. Furthermore, you can configure the controller to adopt the EAPs in the local network and then manage the EAPs centrally.

- **Using a Mobile Device as the Management Device**

1. Set Up the Network

Set up your network according to the following figure. EAPs and the controller are connected to the local network. Devices in the local network can obtain their IP addresses from the router and access the internet via the router. Make sure that both the remote management device and the controller have access to the internet.

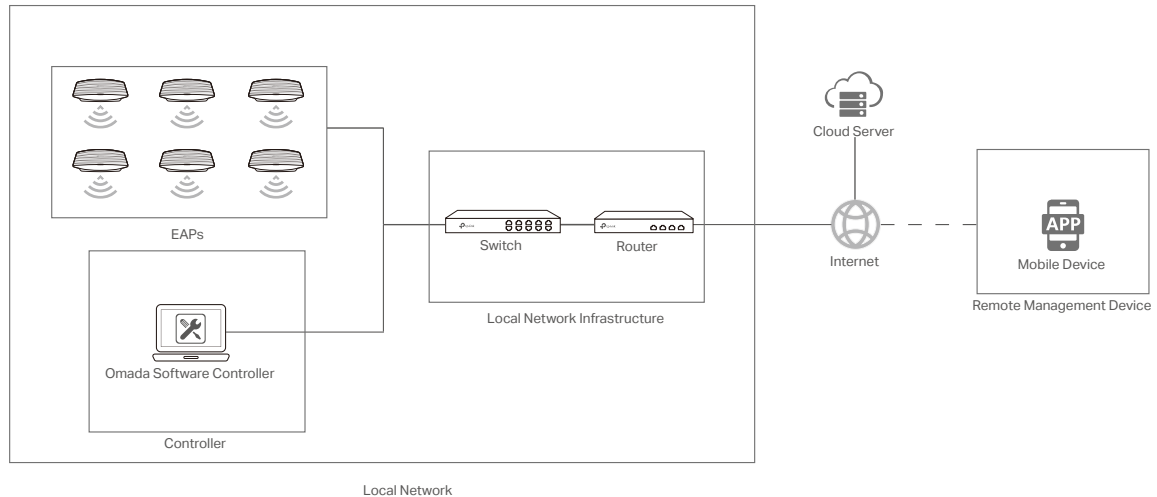

2. Register a TP-Link ID

If you already have a TP-Link ID, skip this step. Otherwise, register a TP-Link ID.

- 1) Launch the Omada APP on your mobile device.

If you don't have an Omada APP, you can download it from APP Store or Google Play, or simply scan the QR Code below.



- 2) Go to the **Account** page, click **Login**, and click **Sign Up** to load the following page. Enter your email address and a password. This email address will be your TP-Link ID. Check the box next

to I agree to TP-Link's Term of Use and Privacy Policy, if you agree to them. Click **Sign Up**. An activation email will be sent to your email address.

No SIM 4:53 PM

<

Sign Up

Create a TP-Link ID.

Email

Password

☒ I agree to TP-Link's [Terms of Use](#) and [Privacy Policy](#).

Sign Up

3) Check your email box for the activation email. Click on the **Click to Finish Registration** button.



☐ [Activate Your TP-Link ID](#)

Hi,

Thank you for registering for a TP-Link ID.

To complete your TP-Link ID registration, please click the following button **within an hour**:

Click to Finish Registration


Do not reply to this email; it was sent from an unmonitored email address.


For inquiries, please contact our Technical Support at www.tp-link.com/support.

Sincerely,
TP-Link Cloud Team

Congratulations! You are now an Omada Cloud user.

3. Bind the Controller to Your TP-Link ID


Launch the Omada Software Controller. Launch a web browser to manage the Omada Software Controller. On the management page, click  and go to the **Cloud Access** page. Enable the **Cloud Access** function. Enter your email address and password. Click **Log in and bind**.

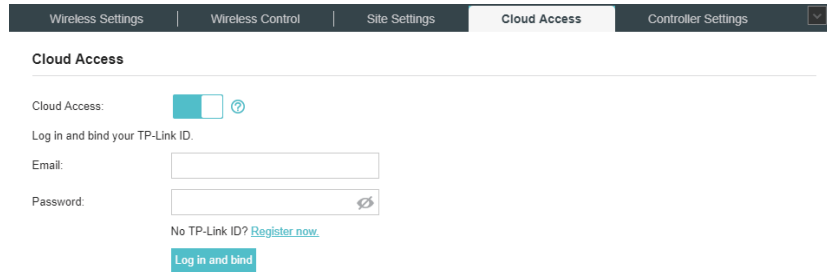

The controller is now bound to your TP-Link ID.


4. Log In with Your TP-Link ID

On the Omada APP, go to the **Account** page and click **Login** to load the following page. Enter your email address and password. Check the box next to **I agree to TP-Link's Term of Use and Privacy Policy**, if you agree to them. Click **Log In**.

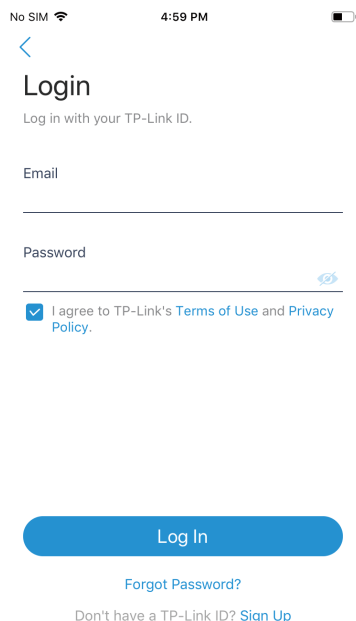

5. Open the Controller Management Page


On the **Cloud Access** page, click on the Omada Controller to open the controller management page.

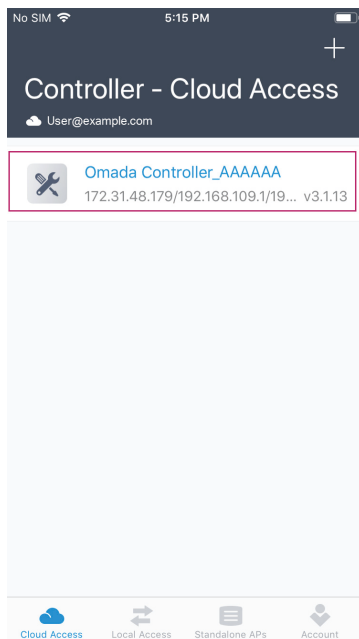

Now you can access the controller remotely. Furthermore, you can configure the controller to adopt the EAPs in the local network and then manage the EAPs centrally.

2 How Cloud Access Works


The following figure shows the typical network topology of Cloud Access. In this topology, different network devices perform certain functions, which are shown in the table below.

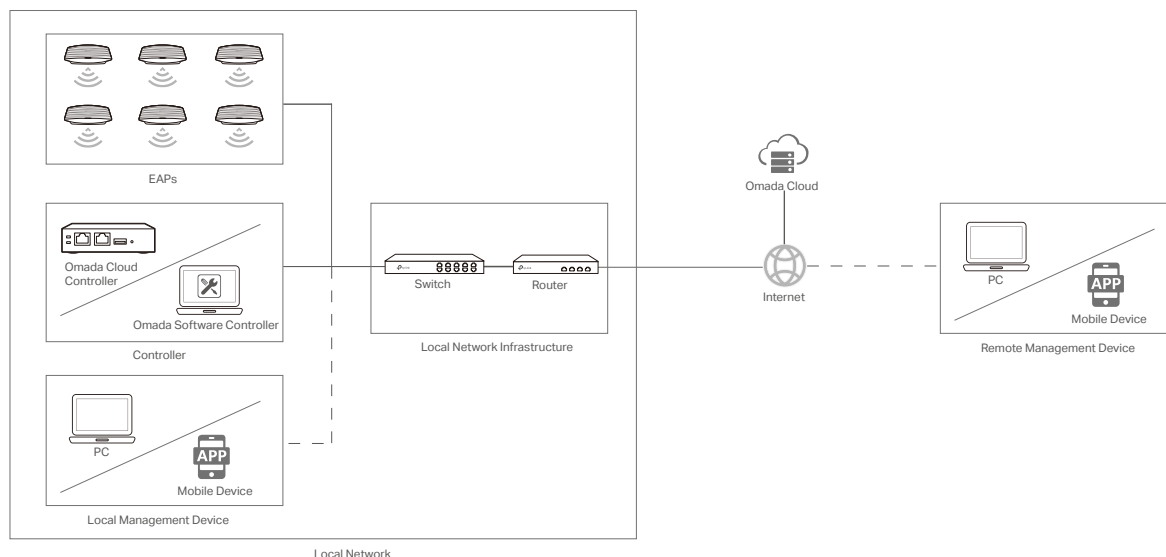

Devices	Descriptions
EAPs	<ul style="list-style-type: none"> EAPs serve as the access points, which your wireless clients are connected to.
Controller: Omada Cloud Controller or Omada Software Controller	<ul style="list-style-type: none"> A controller can manage mass EAPs centrally in the local network. You can access the controller via a local management device. You can also access the controller remotely via Omada Cloud.
Management Device: PC or mobile device	<ul style="list-style-type: none"> A management device provides a user interface, where you can manage the controller. The management device can be located either on the local network or at a remote site. When located at a remote site, it can access the controller with the help of Omada Cloud. If you run an Omada Software Controller on a PC, the PC is typically the local management device as well.
Local Network Infrastructure: Router and switch	<ul style="list-style-type: none"> Local network infrastructure refers to devices which are essential to a basic network, including routers and switches. A router serves as a gateway. Local devices can access the internet via the gateway. A router can also serve as a DHCP server, which assigns IP addresses to local devices. A switch has many ports and can expand the network scale.
Omada Cloud	<ul style="list-style-type: none"> Omada Cloud helps transmit data between the controller and remote management devices.

After the Cloud Access function is all set, you can access the controller on the remote management device via Omada Cloud. The data transmission process is illustrated in

the following figure. Note that the whole process is instant and transparent to you, as if you were configuring and monitoring the controller directly on the remote management device.

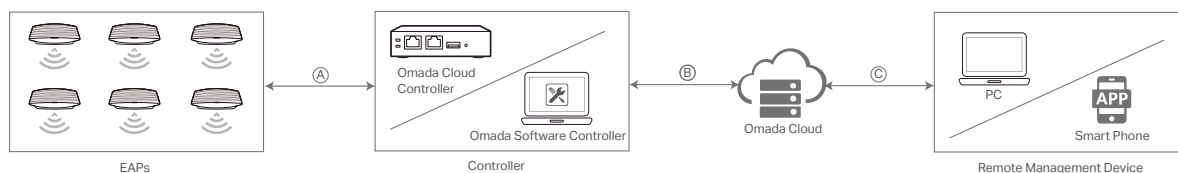

- The controller gathers status of EAPs and centrally monitors EAPs in the local network.
- Ⓐ
- The controller can send your configurations to EAPs and the status of EAPs can be changed according to your configurations.
-
- The controller updates its status to Omada Cloud.
- Ⓑ
- Omada Cloud can send your configurations to the controller. The status of the controller can be changed according to your configurations.
-
- The remote management device gets the status of the controller from Omada Cloud and displays the status on the user interface.
- Ⓒ
- You can configure the controller on the user interface and the remote management device will send your configurations to Omada Cloud.

Process Ⓐ requires that the controller adopt EAPs. Process Ⓒ requires that the remote management device access the internet and you log in with your TP-Link ID, which was previously registered. Process Ⓑ requires that Cloud Access be enabled on the controller, and the controller have access to the internet and be bound to your TP-Link ID. For detailed configuration steps, refer to the [How to Configure Cloud Access](#) section.